

Big Sun Industry Co.,Ltd.


SPECIFICATION FOR APPROVAL

5F, No.398, Keelung Rd. Section 1, Taipei(110), Taiwan.

Tel: 886-2-2758 3131 Fax: 886-2-2758 2233

E-mail: sales@bsunlight.com Http://www.bsunlight.com

Figure:

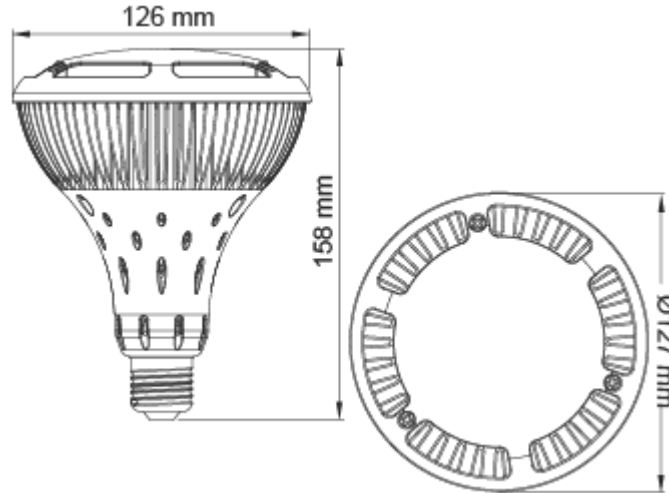

Model No.	PAR38D-9Watt Warm White	PAR38D-9Watt Cool White	PAR38D-15Watt Warm White	PAR38D-15Watt Cool White
CCT (Typical)	3000 K	6000 K	3000 K	6000 K
Typical Power Consumption	10.4 W		17.2 W	
Typical Lumens Output (lm)	440 lm	594 lm	743 lm	924 lm
Input Voltage	100-240V AC; 50-60 Hz			
Input AC Current (Max.)	0.3 A Max.			
Socket Base	E26 / E27			
Operation Temperature	-20 °C — +40 °C			
Typical Luminous Efficacy	43lm/W	58 lm/W	44 lm/W	54 lm/W
CRI	> 80	> 75	> 80	> 75
Beam Angle	120 ° / 60 ° (Option)			
Warranty	3 Years			
Applications	Architectural Lighting/ Cabinet Lighting/ Commercial Lighting/ Landscape Lighting/ Spot Lighting/ Accent Lighting/ Hallway Lighting			
Outline Dim.	Φ 127*158 (mm)			
Net. Weight	0.45 (Kgs)			
Package	12 Boxes / Carton			
Box Dimension/ Weight	L=163*160*200(mm) / 0.60 (Kgs)			

APPROVED & CHECKED BY: Stanley Chen **Tested By:** Jack Ho **Date:** 2010/12/01